

# Easton Elongated

Elongated Front, Vitreous China Two-Piece Toilet



## FEATURES

- Contemporary design
- 1.6 Gpf / 6.0 Lpf
- TotalFlush™ flushing technology for a reliable flush first time — every time.
- 2" glazed trapway
- Available in White and Bone
- Upgrade with a color-match SmartClose™ or Primo™ toilet seat
- Outstanding protection — The Mansfield® limited lifetime warranty

Model No.	Description	Approx. Wt.
	Elongated front, (1.6 Gpf/6.0 Lpf) two-piece toilet. 12" rough-in. Includes tank trim and front-mount, color-match plastic trip lever. Less toilet seat and supply. Specify color.	70 lbs. (32 kg)
<b>820-15</b>	Elongated front toilet bowl only. 12" rough-in. Less toilet seat. Specify color.	40 lbs. (18 kg)
<b>820-26</b>	Tank and cover only, with front-mount, color-match plastic trip lever. Less supply. Specify color.	30 lbs. (14 kg)
<b>SB1175</b>	Elongated, SmartClose™ toilet seat. Specify color.	5.5 lbs. (2 kg)
<b>SB1200</b>	Elongated, Primo™ toilet seat. Specify color.	5.5 lbs. (2 kg)

Shown with SB1200  
Primo™ toilet seat



TotalFlush®

# Easton Elongated

Elongated Front, Vitreous China Two-Piece Toilet

## FEATURES & UPGRADES

### TotalFlush™ Flushing Technology

This gravity fed toilet features a 1.6 gpf / 6.0 lpf anti-siphon ballcock, durable flush valve and glazed trapway. TotalFlush™ offers a complete flush the first time — every time. Ideal for residential applications or light commercial use.



### 202-1012 Flush Valve

The 202 flapper style flush valve provide 1.6 gpf / 6.0 lpf water conservation efficiency. Plastic construction provided non-corrosive, long-life dependability. Won't rust or corrode.



### 89-1012 Anti-Siphon Ballcock

The 89 anti-siphon ballcock affords efficient tank toilet operation at high or low water pressures. Adjustment screws allows water level adjustment without bending the float rod. Completely non-electrolytic and non-corrosive.



### Add a Toilet Seat

With a simple touch, Mansfield's newest SmartClose™ toilet seat closes gently and quietly. Or upgrade your toilet with a popular Primo™ toilet seat. Made of durable, high impact, heavy-duty plastic. For all applications - Get More, Get Mansfield®.




## TECHNICAL INFORMATION

<b>Material</b>	Vitreous China
<b>Water Pressure Range</b>	20 to 80 P.S.I
<b>Flush System</b>	TotalFlush™ Flushing Technology
<b>Water Usage</b>	1.6 Gpf / 6.0 Lpf
<b>Water Surface Area</b>	9-1/4" x 8"
<b>Trap Diameter</b>	2-1/4"
<b>Trap Seal</b>	2"
<b>Rough-in</b>	12"
<b>Shipping Dimensions</b>	Model 820-15 26-1/2" x 15-1/8" x 15-3/4" (673 mm x 384 mm x 400 mm) Model 820-26 18-3/4" x 8-1/8" x 14" (478 mm x 206 mm x 356 mm)
<b>Shipping Weight</b>	Model 820-15 - 40 lbs (18 kg) Model 820-26 - 30 lbs (14 kg)
<b>Warranty</b>	Vitreous China - Limited Lifetime; Tank Trim - Limited One Year

These dimensions are nominal and are subject to change without prior notice.

Fixture performance and specifications meet or exceed, ANSI/ASME A112.19.2 standards and CAN/CSA B45.0 standards, and other state and local codes.

See our complete line of acrylic and vitreous china bathroom fixtures, plastic tank trim and plumbing products.

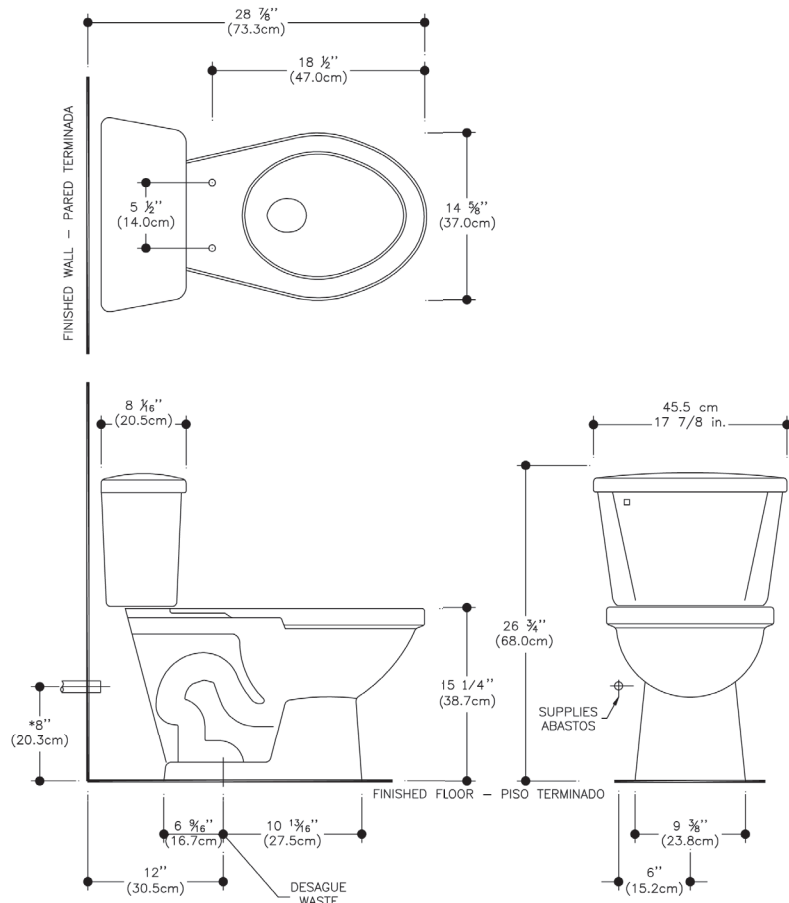

NOTE: Install this product according to the installation guide. Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2